


# LIGHT SKY<sup>®</sup>

FLY DRAGON LIGHTING EQUIPMENT CO.,LTD

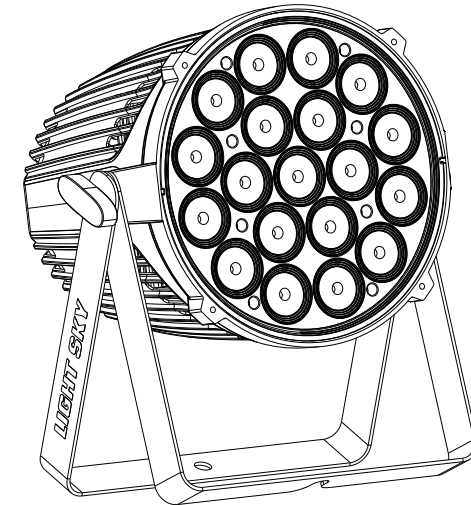

## PL1915

## USER CHANNEL

Please read these user manual carefully before use

## LIGHT SKY<sup>®</sup>

Tel:0086-20-61828288

Fax:0086-20-61828188 Pc:510800

Web:www.lightsky.com.cn

E-mail: flydragon@lightsky.com.cn

asia@lightsky.com.cn

india@lightsky.com.cn

europa@lightsky.com.cn

latinamerica@lightsky.com.cn

middle-east@lightsky.com.cn

american@lightsky.com.cn

Address: No. 43, Yunfeng Road, Xiuquan Street,  
Huadu District, Guangzhou, China



LIGHT SKY<sup>®</sup>



## CHANNEL FUNCTION

### Channel ( Standard 9CH )

Channel	Value/DMX	Function	Note
<b>9CH</b>			
1		Shutter	
	0..2	No function	
	3..255	Strobe effect slow to fast	
2		Dimmer	
	0..255	Dimmer 0%...100%	
3		Red	
	0..255	0-100% Red dimmer from dark to bright	
4		Green	
	0..255	0-100% Green dimmer from dark to bright	
5		Blue	
	0..255	0-100%Blue dimmer from dark to bright	
6		Lin	
	0..255	0-100% Lime dimmer from dark to bright	
7		Color temperature selection	
	0..2	No function	
	3..49	White Color Temp 3200K Section	
	50..99	White Color Temp 4000K Section	
	100..149	White Color Temp 5600K Section	
	150..199	White Color Temp 6800K Section	
	200..249	White Color Temp 7500K Section	
250..255	White Color Temp 8500K		
8		Pixel Function	
	0..2	No function	
	3..34	Red DOWN/Green 0%/Blue 0% /LinUp	
	35..50	Red 0%/Green Up/Blue 0% /Lin Down	
	51..67	Red 0%/Green Up/Blue 0%/ Lin 0%	
	68..83	Red 0 %/Green DOWN/Blue Up / Lin 0%	
	84..99	Red 0 %/Green 0%/Blue Up / Lin 0%	
	100..114	Red Up/Green 0%/Blue Down /Lin 0%	
	115..127	Red 100%/Green 0%/Blue 0% /Lin 0%	
128..255	Color MacroFuntion Speed from fast to slow		
9		Inner and outer ring selection selection function	
	0..2	<u>Both outer ring and inner ring can be selected and controlled</u>	
	3..19	The outer ring is adjustable, the inner ring is black	
	20..39	The outer ring keeps the previous color, the inner ring is adjustable	
	40..59	Adjustable inner ring, black field of outer ring	
	60..79	The inner ring keeps the previous color, the outer ring is adjustable	
	80..199	The inner ring keeps the previous color, the outer ring is adjustable	
	200..219	Dimming curve 1 (no fast dimming)	
	220..229	Fast dimming 1	
	230..239	Fast dimming 2	
240..255	Fast dimming 3		

### Channel (4CH)

Channel	Value/DMX	Function	Note
<b>4CH</b>			
1		<b>Shutter</b>	
	0..2	No function	
	3..255	Strobe effect slow to fast	
2		<b>Dimmer</b>	
	0..255	Dimmer 0%...100%	
3		<b>Color temperature selection</b>	
	0..2	No function	
	3..49	White Color Temp 3200K Section	
	50..99	White Color Temp 4000K Section	
	100..149	White Color Temp 5600K Section	
	150..199	White Color Temp 6800K Section	
	200..249	White Color Temp 7500K Section	
250..255	White Color Temp 8500K		
4		<b>Pixel Function</b>	
	0..2	No function	
	3..34	Red 100%/Green 100%/Blue 0% /Lin Up	
	35..50	Red 100%/Green Up/Blue 0% / Lin Down	
	51..67	Red Down/Green 100%/Blue 0%/ Lin 0%	
	68..83	Red 0%/Green 100%/Blue Up / Lin 0%	
	84..99	Red 0%/Green Down/Blue 100% / Lin 0%	
	100..114	Red Up/Green 0%/Blue 100% /Lin 0%	
	115..127	Red 100%/Green 0%/Blue Down /Lin 0%	
128..255	Color MacroFuntion Speed from slow to fast		